

IMV VIBRATION TEST SYSTEMS

J series

Air-cooled Vibration Test Systems

J250/SA6HAG J250/EM6HAG



Long duration shock tests require high velocity and large displacement. J-series is a high-frequency system that offers usability and durability furnished with functions that accommodates high velocity and displacement testing.

[Expanded maximum test range]

- Maximum velocity of Sine force: 2.4 m/s
- Maximum velocity of Shock force: 4.6 m/s
- Maximum displacement: 100 mmp-p

[Patented upper (armature) support system PS Guide] Parallel Slope Guide is standard.

[All models can be directly coupled to a climatic chamber.]



① High Velocity and Large Displacement

High velocity of 2.4 m/s and Large displacement of 100 mmp-p (4 inch).



■ PSG guide system

② Improvement of Testing Environment

With the operation of Intelligence Shaker Management (ISM), EM range can reduce power consumption and CO2 emissions automatically.

eco-shaker

② User first principle

Compatible with K2 vibration controller. Intuitive interface leads The operator with user-friendly guidance.



IMV VIBRATION TEST SYSTEMS

J series

Air-cooled Vibration Test Systems

J250/SA6HAG J250/EM6HAG



System Specification			
System Model		J250/SA6HAG	J250/EM6HAG
Frequency Range (Hz)		0-2,200	0-2,200
Rated Force	Sine (kN)	40	40
	Random (kN rms) ^{*1}	40	40
	Shock (kN)	80	80
	High Velocity Shock (kN) ^{*4}	-	77
Maximum Acc.	Sine (m/s ²)	888	888
	Random (m/s ² rms)	622	622
	Shock (m/s ²)	1,777	1,777
	High Velocity Shock (m/s ² peak) ^{*4}	-	1,711
Maximum Vel.	Sine (m/s)	2.4	2.4
	Shock (m/s peak)	2.4	2.4
	High Velocity Shock (m/s peak) ^{*4}	-	3.5
Maximum Disp.	Sine (mmp-p)	100	100
	High Velocity Shock (mmp-p)	-	100
Maximum Travel (mmp-p)		120	120
Maximum Load (kg)		600	600
Power Requirements (kVA) ^{*2}		57	57
Breaker Capacity (A) ^{*3}		100	100



Vibration Generator (J250)	
Armature Mass (kg)	45
Armature Diameter (φ mm)	440
Armature Resonance (Hz)	1,700
Allowance Eccentric Moment (Nm)	1,550
Mass (kg)	3,500

Power Amplifier	SA6HAG-J50	EM6HAG-J50
Maximum Output (kVA)	57	
Mass (kg)	910	960


Cooling (VAPE710/P2R)	
Mass (kg)	250

Environmental Data		
Input Voltage Supply (3 φ, V)		380/400/415/440
Compressed Air Supply (Mpa)		0.6
Working Ambient Temperature	Shaker (°C)	0-40
	Amplifier (°C)	0-85

Vibration Generator (J250) **a: W 1,463 mm** **b: H 1,301 mm** **c: D 1,100 mm** **d: 860 φmm** Table Insert Pattern (unit: mm)

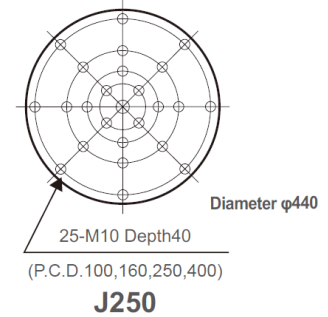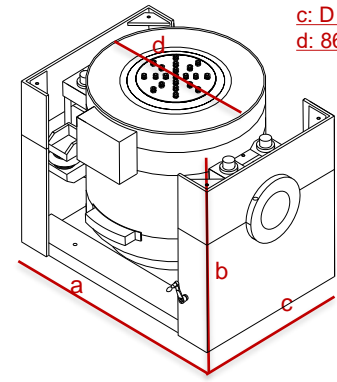


Amplifier

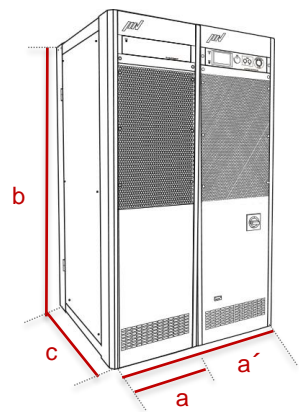

SA6HAG-J50
a: W 580 mm
b: H 1,950 mm
c: D 850 mm

EM6HAG-J50
a': W 1,160 mm
b: H 1,950 mm
c: D 850 mm

Blower

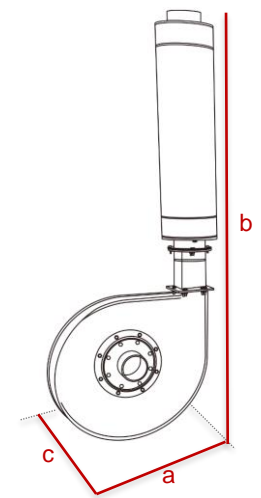

a: W 1,160 mm
b: H 2,405 mm
c: D 787 mm

^{*1} Random force ratings are specified in accordance with ISO5344 conditions. Please contact IMV or your local distributor with specific test requirements.
^{*2} Power supply: 3-phase 380/400/415/440 V, 50/60 Hz. A transformer is required for other supply voltages.
^{*3} Breaker capacity for 480 V.
^{*4} For high velocity option
 *The specification shows the maximum system performance. For long-duration tests, system must be de-rated up to 70%. Continuous use at maximum levels may cause failure. Please contact IMV if your system operates at more than 70%.
 *For random vibration tests, please set the test definition of the peak value of acceleration waveform to operate at less than the maximum acceleration of shock.
 *Frequency range values vary according to the sensor and vibration controller.
 *Armature mass and acceleration may change when a chamber is added.

