

# IMV VIBRATION TEST SYSTEMS

## m series

Low Acoustic Noise  
Air Cooled Vibration Test Systems

## m130LS / MA1-CE

# m


m130LS is easy to operate and can be installed by yourself.

Test file will be automatically generated just on selection of the test condition defined by the test standard when you use "Launcher software".\*

When you use Non-Gaussian software you can precisely reproduces non-Gaussian vibration such as transportation vibration with large spikes.\* \* When using K2 controller

### 1. Supports a wide range of tests despite its small size

Despite its small size, it is possible to test packages of Maximum 220 lbs, 120 size class under various conditions defined by official standards such as ISO, JIS, ASTM, and Amazon transportation test standards. The amplitude is larger than the conventional m-series.



### 2. Realization of testing time reduction


With the launcher software, a test file is automatically generated just on selection of the test condition defined by the test standard. Similarly, in the case of specified test conditions, the test conditions can be saved and reproduced easily, and the test time can be shortened.

\* When using K2 controller



### 3. Can be installed anywhere

It is available in single-phase AC230 V or 240V.



IMV CORPORATION

### Low Acoustic Noise Air Cooled Vibration Test Systems m130LS / MA1-CE




System Specification		
Frequency Range (Hz) *1	2-1,000	
Rated Force	Sine (lbf)	292
	Random (lbf rms)	146
	Shock (lbf)	292
Maximum Acc.	No Load (g)	13
	0.5 kg Load (g)	12
	1.0 kg Load (g)	11
Maximum Velocity (in/s)	39.4	
Maximum Displacement (in-p)	2.0	
Maximum Load (lbs)	220	
Power Requirements (kVA) *2	1.0	

Vibration Generator (m130LS-CE)	
Armature Support Method	Air Suspension
Armature Mass (lbs)	22
Armature Diameter (φ in)	7.1
Mass (lbs)	550


Power Amplifier (MA1-CE)	
Maximum Output (kVA) *2	1.0
Mass (lbs)	55
Cooling Method	Air cooling
External Cables (in) *3	118

Cooling		
Blower	Housed in vibration generator	
Environmental Data		
Power Requirement (kVA) *2	1.1	
Input Voltage Supply (1 φ, V) *2	100V or 200-240 V ± 10% 50/60 Hz	
Working Ambient Condition	Temperature (F)	32-75
	Humidity (%RH)	0-85


Vibration Generator (m130LS-CE) **a: W 16.1 in** Table Insert Pattern (unit:mm)

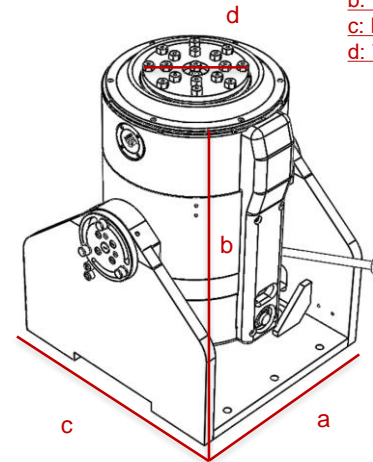

**b: H 23.3 in**  
**c: D 18.1 in**  
**d: 7.1 φ in**



Amplifier (MA1-CE) **a: W 17 in**  
**b: H 6 in**  
**c: D 17 in**

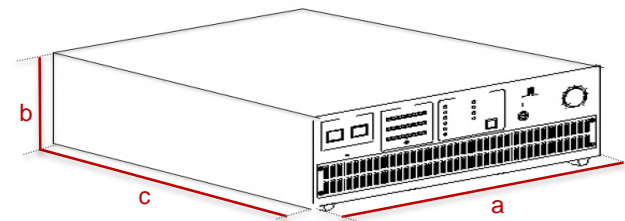

\*1) Frequency range values vary according to sensor and vibration controller.  
\*2) Power supply: single-phase AC100 V/200 V or AC110 V/220 V or AC120 V/240 V ± 10% 50/60 Hz.  
A transformer is required for other supply voltages.  
\*3) Longer external cables are provided as an option.